

SUMEC

Phono[®] Solar
AUSTRALIA

355W-375W

HIGH EFFICIENCY MONO-PERC

TWIN PLUS

MODULE SERIES

15 DIAMOND
YEAR DEALER
PRODUCT WARRANTY

**BLUE
CHIP**[™]
Solar Panel

**120
CELLS**

Outstanding Product Performance

- Competitive high-temperature performance with ameliorated temperature coefficient
- Minimised power loss in cell connection
- Better performance under shading effect
- Decreased nominal operating cell temperature to $43 \pm 2^\circ \text{C}$
- Higher power generation with multi-busbar and half-cut technology

Trustworthy Quality and Reliability

- Guaranteed 0-+5W positive tolerance secures reliable power output
- 5400Pa maximum snow load, 2400Pa maximum wind load
- Optimised electrical design lowers hot spot risk and operating current

PID Resistant

- Industry-leading cell processing technology and electrical design ensure solid PIO resistance



SUMEC
Phono[®] Solar
AUSTRALIA

SUMEC PHONO SOLAR AUSTRALIA
Level 35, Tower One, 100 Barangaroo Ave, Sydney, AUSTRALIA
TEL: 02 8114 4516 www.phonosolar.com.au

PHONO SOLAR INTERNATIONAL (SUMEC)
No. 1 Xinghuo Rd., Nanjing Hi-tech Zone, Nanjing, CHINA
www.phonosolar.com

- 15-year product warranty
 - 25-year linear performance warranty to 80.2%
1. In compliance with our warranty terms and conditions.

NOTE: This datasheet is not legally binding. Phono Solar reserves the right to make specifications changes without notice. Further information can be found on our website: www.phonosolar.com

ELECTRICAL TYPICAL VALUES

Model	PS355M4-20/UH PS355M4H-20/UH	PS360M4-20/UH PS360M4H-20/UH	PS365M4-20/UH PS365M4H-20/UH	PS370M4-20/UH PS370M4H-20/UH	PS375M4-20/UH PS375M4H-20/UH
Type	Monocrystalline 6 inch x 3 inch, 2 x 60 cells				
Rated Power (Pmpp)	355	360	365	370	375
Tolerance	0~+5	0~+5	0~+5	0~+5	0~+5
Rated Current (Imp)	10.59	10.68	10.76	10.85	10.93
Rated Voltage (Vmpp)	33.53	33.71	33.93	34.11	34.31
Short Circuit Current (Isc)	11.30	11.40	11.50	11.60	11.70
Open Circuit Voltage (Voc)	40.73	40.91	41.09	41.26	41.44
Module Efficiency (%)	19.00	19.27	19.54	19.80	20.07

TEMPERATURE RATINGS

NOCT (Nominal Operation Cell Temperature)	43°C ± 2°C
Voltage Temperature Coefficient	-0.30%/°C
Current Temperature Coefficient	+0.050%/°C
Power Temperature Coefficient	-0.38%/°C



PACKING CONFIGURATION

Container	20'GP	40' HQ
Pieces per container	300	720

ABSOLUTE MAXIMUM RATING


Operating Temperature	From -40 to +85°C
Hail Diameter@ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	20A
PV Module Classification	II
Module Fire Performance (UL 1703)	Type 4
Maximum System Voltage	DC 1000V/1500V

WEAK LIGHT PERFORMANCE

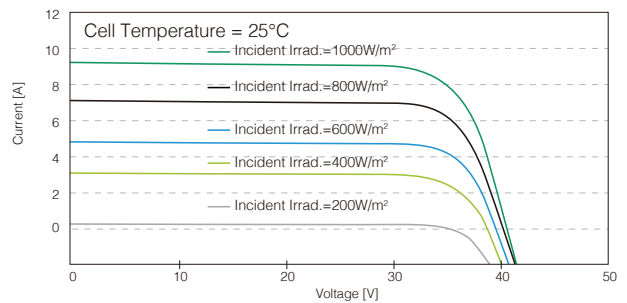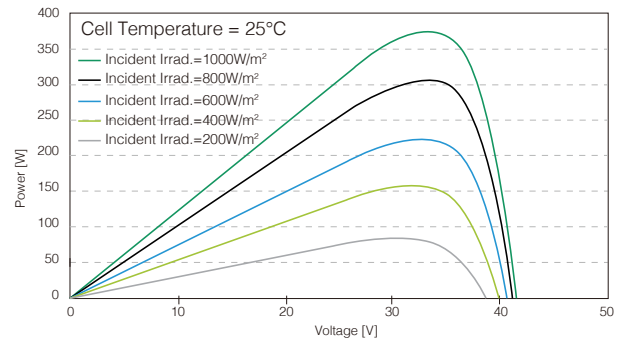

MECHANICAL CHARACTERISTICS

Dimensions	Length: 1776mm, Width: 1052mm Height: 35mm
Weight	20kg
Front Glass	3.2mm toughened glass
Frame	Anodized aluminium alloy
Cable	4mm ² (IEC), L: 350mm, H: 1150mm
Junction Box	IP 68 rated
Connectors	Genuine MC4 (1000V) / EVO2 (1500V)

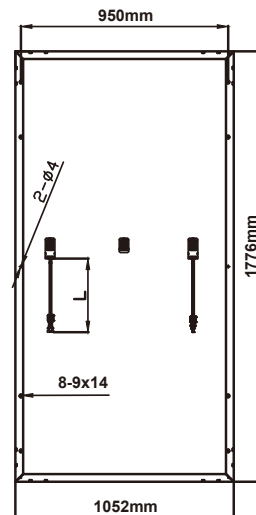

1. In compliance with our warranty terms and conditions.
2. Measurement conditions under irradiance level of Standard Test Conditions (STC): Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C.

